



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)


<p>(51) International Patent Classification ⁵ : A61M 25/01</p>	<p>A1</p>	<p>(11) International Publication Number: WO 94/26343 (43) International Publication Date: 24 November 1994 (24.11.94)</p>
<p>(21) International Application Number: PCT/IB94/00058 (22) International Filing Date: 6 April 1994 (06.04.94) (30) Priority Data: 08/061,083 14 May 1993 (14.05.93) US (71) Applicant: SCHNEIDER (USA) INC. [US/US]; 5905 Nathan Lane, Plymouth, MN 55442 (US). (72) Inventor: VANCE, Jeffrey, D.; 7703-24th Avenue No., Hugo, MN 55038 (US). (74) Agents: SPIEGEL, Allen, J. et al.; Pfizer Inc., Patent Dept., 235 East 42nd Street, New York, NY 10017 (US).</p>		<p>(81) Designated States: AU, CA, DE (Utility model), JP, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published With international search report.</p>

=EP 0697899

(54) Title: EXCHANGEABLE GUIDEWIRE

(57) Abstract

A guidewire (16) for guiding and exchanging body insertable catheters includes a body insertable guide section (18) and an exchange section (20), both formed of flexible wire. In one embodiment, a pin connector (28) at the distal end of the exchange section (20) includes a truncated conical head (32), a shank (40), and a groove (44) between the head (32) and the shank (40). A socket connector (24) is attached to the proximal end of the guide section (18). Four indentations (58, 60, 62, 64) are formed in the socket connector (24), spaced apart angularly 90° from one another. The maximum diameter of the conical head (32) is greater than the distance between opposed nodules (58, 60, 62, 64), but less than the inside diameter of the socket connector (24). Thus, the pin connector (28) is insertable into the socket connector (24) and temporarily elastically deforms the socket as the conical head (32) moves past the nodules (58, 60, 62, 64). Once the head (32) is beyond the nodules (58, 60, 62, 64), the nodules (58, 60, 62, 64) are captured within the groove (44), to allow rotation of the exchange section (20) relative to the guide section (18) while preventing any substantial axial relative movement of the sections (18, 20). The exchange section (20) can be disconnected from the guide section (18) by withdrawing the pin connector (28) proximally, again elastically deforming the socket (24) as the head (32) passes the nodules (58, 60, 62, 64).

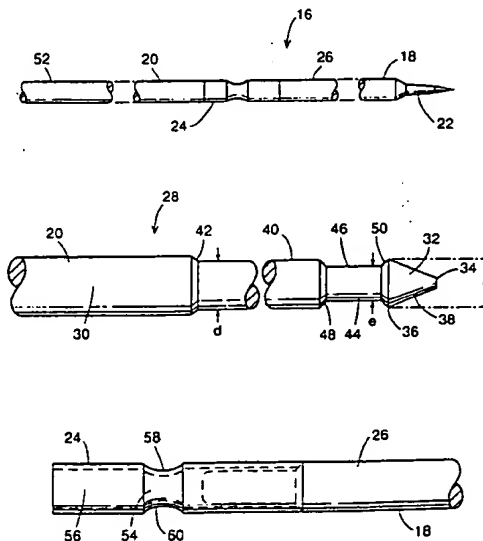

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

-1-

EXCHANGEABLE GUIDEWIRE

Background of the Invention

The present invention relates to devices employed in catheter guiding and exchanging procedures, and more particularly to guidewire and exchange wire interconnection apparatus.

Catheterization procedures, e.g. percutaneous transluminal angioplasty catheterization (PCTA), involve insertion of catheters into blood vessels and other body passageways. Frequently such passageways are convoluted, giving rise to difficulties in inserting the catheters. Accordingly, guidewires are employed to insure accurate positioning of body-inserted catheters.

More particularly, a guidewire is inserted and maneuvered along arterial or other passageways to the desired treatment site, leaving a proximal portion of the guidewire outside of the patient. Next, the catheter is threaded onto the guidewire proximal portion, which is received into a lumen formed in the catheter. The catheter is advanced over the guidewire, and thus guided to the desired treatment site. Typically the guidewire is at least slightly longer than the catheter, so that when the catheter is completely advanced to the treatment site, at least part of the guidewire proximal end portion protrudes from the catheter. For example, for a catheter length of 130 centimeters, the guidewire length can be about 150 centimeters.

Frequently in catheterization, the need arises to exchange catheters. Preferably the exchange is accomplished with the guidewire remaining in place, to avoid the need to maneuver yet another guidewire to the treatment site. An exchange requires gripping the guidewire proximal end portion to maintain its position while the catheter is removed in the proximal direction. However, well before the originally inserted catheter can be withdrawn in this manner, it completely covers the guidewire, and the physician or other user can not

-2-

simultaneously maintain the guidewire and proximally move the catheter.

In view of this difficulty, the usual approach has been to remove the guidewire from the patient, leaving the originally inserted catheter in place to guide the advancement of an exchange wire to the treatment site. The exchange wire is substantially longer than the guidewire. The proximal portion of the exchange wire, remaining outside of the patient after complete insertion, is longer than the length of the catheter. Thus, the exchange wire can be maintained while the catheter is completely withdrawn from the patient. After a replacement catheter is inserted over the exchange wire, the exchange wire is removed and the guidewire reinserted.

The repeated advancing and withdrawing of guidewires and exchange wires presents undue risk of trauma to the blood vessels or other lumens, and increases the complexity and required time for the catheterization procedure.

Several guidewire and exchange wire coupling schemes have been proposed to avoid the need for the wire exchanges. For example, U. S. Patent No. 4,917,103 (Gambale et al) and U. S. Patent No. 4,922,923 (Gambale et al) disclose a guidewire and exchange wire interconnection system. A hollow tubular fitting is provided at the proximal end of the guidewire, while a reduced diameter tip is formed at the distal end of the exchange wire. With the distal tip inserted into the tube, the tube is crimped to form a permanent coupling of the wires.

U. S. Patent No. 4,966,163 (Kraus et al) shows an extendable guidewire including a main section and an extension section. A releasable coupling of these sections is provided by an externally threaded male contact at the proximal end of the main section, and an internally threaded female contact at the distal end of

-3-

the extension section. The female contact is mounted to rotate relative to the extension section.

Yet another coupling scheme is disclosed in U. S. Patent No. 4,827,941 (Taylor et al). A guidewire assembly includes a main section with a reduced diameter undulating (sinusoidal) male contact at its proximal end. An extension section includes a tube at its distal end. The sinusoidal contact elastically deforms as it is inserted into the tube, to provide a friction fit. A similar approach is shown in U. S. Patent No. 4,958,642 (Christian et al). Another friction fit approach is disclosed in U. S. Patent No. 4,875,489 (Messner et al). A main section of an extendable guidewire has a tapered proximal end. An auxiliary section of the guidewire has a tube at its distal end. The tube has a longitudinal gap, and thus expands to receive the tapered end of the main section and resiliently retain the tapered end once inserted.

While the above approaches perhaps are an improvement as compared to multiple wire exchanges, each encounters difficulties, particularly in connection with smaller guidewires and exchange wires, which can have diameters as low as ten one-thousandths of an inch (0.025 cm).

Therefore, it is an object of the present invention to provide a single device for performing the functions of the guidewire and the exchange wire in catheterization procedures.

Another object of the invention is to provide a simple and reliable means for releasably coupling a guidewire and an exchange section proximal to the guidewire.

A further object is to provide a guidewire/exchange wire system with separate guide and exchange sections releasably coupled to one another in a manner that prevents the transfer of torque from one section to the other.

-4-

Yet another object is to provide a guidewire with complementary contacts for coupling an exchange section to a guide section of the guidewire, in a manner that affords a tactile sense of completing the connection.

5

Summary of the Invention

To achieve these and other objects, there is provided an interconnection apparatus for body insertable guidewires and exchange wires. The apparatus includes a first connector fixed to one end of a first wire. The
10 first connector is substantially symmetrical about a first connector axis and has first and second axially opposite end regions. A groove is formed in the first connector between the end regions. A second connector, fixed to one end of a second wire, has a second connector
15 axis and a projection means. The first and second connectors are positionable in confronting and axially aligned relation, for axial movement of the connectors relative to one another toward a mechanical coupling. When the connectors are mechanically coupled, the
20 projection means extends radially into the groove. At least one of the connectors is elastically deformable to allow passage of the projection means axially inward past one of the end regions and into the groove as the connectors are moved axially relative to one another.
25 Once the projection means has passed that end region and resides within the groove, the end regions tend to confine the projection means within the groove to prevent any substantial axial movement of the connectors relative to one another away from the mechanical coupling.
30 Preferably the first and second connectors, when mechanically coupled, are rotatable relative to one another about the first connector axis. This prevents the transfer of torque from one of the wires to the other, and thus reduces or eliminates torsional stress
35 that otherwise can lead to kinking or damage, particularly for wire sections of small diameter, e.g. ten mils (0.025 cm).

-5-

To achieve a releasable coupling, the flexible connector further is elastically deformable to allow axially outward passage of the projection means away from the groove and past the first end region of the first
5 connector, thus to disengage the first and second wires.

In one preferred version of the interconnection apparatus, the first end region is a truncated cone that diverges in the axial direction toward the groove, and the second end region is a shank on the opposite side of
10 the groove from the cone. The outside diameter of the shank and the maximum outside diameter of the truncated cone are substantially equal, both being greater than the outside diameter of the groove. The complementary second connector is a socket having an annular wall, with the
15 projection means comprising four indentations formed in the annular wall along a medial region of the socket. The indentations are angularly spaced apart from one another by 90°, to form two pairs of opposed dimples or nodules at the medial region of the socket. The diameter
20 of the truncated cone and shank is greater than the distance between each pair of nodules. Consequently the socket yields along its medial region to allow passage of the truncated cone, to position the nodules within the groove. Once the truncated cone is past the nodules,
25 they are captured within the groove. The truncated cone and shank cooperate to maintain the nodules in the groove, and thereby maintain the mechanical coupling of the connectors.

The outside diameter of the groove can be selected
30 with reference to the distance between opposed nodules, to permit a substantially free rotation of the socket relative to the first connector. This prevents any substantial transmission of torque from one of the wires to the other.

35 In practice, the first connector (a distal pin) is formed into the exchange wire at its distal end, with the socket fixed to the proximal end of the guidewire. With

-6-

the guidewire inserted into the patient and with its distal tip at the treatment site, the proximal end portion of the guidewire, including the socket, remains outside of the patient. The exchange section of wire is coupled to the guidewire by sliding the first connector distally into the socket, until the projecting nodules and groove are axially aligned.

As mentioned, some elastic deformation of the socket is required to permit the projections to clear the truncated cone. Clearance of the cone leads to at least partial return of the socket to its normal, unstressed configuration, which gives the user a tactile sensation of the mechanical coupling.

Thus, the combination of the pin connector and socket connector provide for a reliable, releasable, and repeatable mechanical coupling of guidewire and exchange sections. The coupling is achieved by simple relative sliding of the pin connector and socket connector, and entry of the protrusions into the groove signals a physician or other user that the coupling is accomplished. The same type of motion, i.e. relative sliding of the connectors, disengages the mechanical coupling. Thus, connecting and disconnecting the wire sections demands relatively little attention on the part of the physician, who then is able to devote most of his or her attention to the catheterization procedure at hand.

In the Drawings

For a further understanding of the above and other features and advantages, reference is made to the following detailed description and to the drawings, in which:

Figure 1 is a side elevation of a guidewire assembly including connected guide and exchange sections constructed in accordance with the present invention;

Figure 2 is an enlarged side elevation of a distal end region of the exchange section;

-7-

Figure 3 is an enlarged side elevation of a proximal end region of the guide section;

Figure 4 is a proximal end view of the guide section;

5 Figure 5 is a sectional view taken along the line 5-5 in Figure 4, with a socket connector of the guide section shown removed from the remainder of the guide section;

10 Figure 6 is a sectional view taken along the line 6-6 in Figure 5;

Figures 7-9 are diagrammatic views illustrating progressive insertion of a pin connector of the exchange section into the socket;

15 Figure 10 is an end view of an alternative embodiment socket connector; and

Figures 11-15 illustrate an alternative embodiment guidewire including pin and socket connectors.

Detailed Description of the Preferred Embodiment

Turning now to the drawings, there is shown in
20 Figure 1 an exchangeable guidewire 16. The guidewire includes two releasably coupled sections: a guide section 18 and an exchange section 20. Sections 18 and 20 preferably are constructed of stainless steel, for example a type of steel known as "No. 304" stainless
25 steel, each being approximately 150 centimeters in length. Guide section 18 and exchange section 20 have the same diameter, which preferably is in the range of from about 0.010 inches (0.025 cm) to about 0.060 inches (0.15 cm). Guide section 18 has a distally converging
30 distal tip 22, and a socket connector or sleeve 24 at its proximal end. Exchange section 20 has a proximal end and a distal end removably inserted into socket 24.

The distal end region of exchange section 20 is shown in Figure 2. A portion of the stainless steel wire
35 at the distal end is selectively removed, to form a pin connector 28. More particularly, material is removed by a precision grinding of the exchange section by relative

rotation of the exchange section and a grinding tool (not shown) about a central longitudinal axis 30 of the exchange section. As a result, pin connector 28 is concentric on axis 30, and transverse profiles, i.e. profiles taken perpendicular to axis 30 along the connector, are circular.

Pin connector 28 has a distal tip or head 32 in the form of a truncated cone, diverging in the proximal direction from a blunt distal end 34 to a maximum cone diameter at 36. This divergence is gradual, in the sense that the angle between the inclined cone surface 38 and axis 30 is less than 45° , and more preferably about 20° . Connector 28 further includes a proximal shank 40, having an outside diameter substantially equal to the maximum diameter of cone 32. Between shank 40 and the remainder of exchange section 20 is an inclined surface 42.

Pin connector 28 further includes an annular recess or groove 44, formed along an intermediate region of the connector between shank 40 and cone 32. Over most of its length, groove 44 has an annular surface 46 concentric on axis 30. On opposite sides of surface 46 are inclined groove surfaces 48 and 50 near the shank and cone, respectively. Surfaces 48 and 50 are steeply inclined, in the sense that the angle of each surface with respect to axis 30 is at least 45° .

Figure 3 shows the proximal end region of guide section 18, including socket connector 24 and a proximal end of the wire forming the guide section. Socket connector 24, over most of its length, has an annular wall in the form of a hollow, circular cylinder. However, at its medial region 54, socket connector 24 is formed to provide four indentations projected inwardly toward a longitudinal central axis 56 of the socket connector. These indentations provide nodules or dimples, formed angularly spaced apart from one another at 90° intervals. Thus, there are two opposed pairs of

-9-

the nodules, one including nodules 58 and 60, and the other pair including nodules 62 and 64 (Figure 4).

As perhaps best seen in Figure 5, the distance "a" between the pair of indentations 58 and 60 is less than the nominal inside diameter "b" of socket connector 24 over the majority of its length. The same is true for the distance between indentations 62 and 64. At the distal end of the socket connector is an annular beveled surface 66.

Further in Figure 5, the proximal end of the guide section is withdrawn from the socket connector to reveal a proximal extension 68 having an outside diameter approximately equal to but slightly less than inside diameter "b" of the socket connector. Between extension 68 and the remainder of guide section 18 is an annular beveled transition surface 70. Socket connector 24 is permanently secured to guide section 18, by an interference fit of extension 68 within socket connector 24, with parallel beveled surfaces 66 and 70 contiguous. Preferably an adhesive is applied to at least one of surfaces 66 and 70 before the socket connector and guide section are engaged, in which case the adhesive further secures the connection.

The maximum cone diameter and the shank outer diameter, indicated respectively at "c" and "d" in Figure 2, are approximately equal to one another, greater than distance "a" between indentations 58-64, and less than inside diameter "b" of socket connector 24. An outside diameter of groove 44, indicated at "e" in Figure 2, likewise is less than diameters "c" and "d", and preferably is about equal to distance "a".

Pin connector 28 and socket connector 24 provide for a releasable mechanical coupling of the exchange and guide sections, in which the socket connector surrounds the pin connector, indentations 58, 60, 62 and 64 are aligned with and captured within groove 44, and axes 30 and 56 substantially coincide. The joiner of connectors

-10-

24 and 28 is illustrated in Figures 7-9. As seen in Figure 7, conical head 32 of the pin connector is inserted into the proximal end of socket connector 24, then moved distally toward indentations 58-62. This insertion is facilitated by the fact that the cone diameter, near distal end 34, is substantially less than the distance "a" between opposed indentations, and thus is substantially less than the interior diameter "b" of the socket connector.

As pin connector 28 is moved rightward as viewed in Figures 7-9, cone 32 eventually encounters the indentations. Further rightward movement of the cone elastically deforms socket connector 24 particularly along medial region 54. Thus, surface 38 of cone 32 functions as a cam, forcing indentations 58-64 apart from one another against the elastic restoring force of the socket, until the maximum diameter portion of the cone is axially aligned with the indentations, as viewed in Figure 8. The gradual (20°) incline of cone surface 38 facilitates insertion of connector 28. More particularly, due to the gradual incline, the required axial insertion force is relatively small as compared to the radial force required to elastically deform the socket connector.

When pin connector 28 is inserted beyond the position illustrated in Figure 8, indentations 58-64 move radially inward due to the elastic restoring force of the socket, into an engagement with groove surface 46. This movement is relatively rapid, due to the steep incline of groove surface 50 and the restoring force. The rapid movement and engagement provide a tactile sensation to the physician or other user attempting to connect the extension and guide sections, that a mechanical coupling has been achieved.

As shown in Figure 9, when connectors 24 and 28 are coupled, indentations 58-64 are axially aligned with and captured within groove 44. The relatively steep incline

-11-

of beveled surface 50 insures that a proximal removal of pin connector 28 requires a substantially greater axial force as compared to connector insertion. The steep incline of beveled surface 48 likewise resists distal
5 insertion of pin connector 28 beyond the desired axial alignment.

Accordingly, the mechanical coupling does not depend upon a frictional engagement of the nodules or indentations against the groove surface. There is no
10 need for an elastic restoring force to maintain the nodules against the groove surface. In fact, in the preferred mechanical coupling, the distance "a" between indentations is approximately equal to the groove diameter "e", so that pin connector 28, when mechanically
15 coupled within socket connector 24, remains free to rotate relative to the socket about connector axes 30 and 56. Consequently, exchange section 20 is maintained axially relative to guide section 18 when coupled, yet is free to rotate relative to the guide section. This
20 arrangement prevents any substantial transfer of torque from the exchange section to the guide section, and thus substantially eliminates the chance for twisting, kinking, and other damage to the wires forming the guide and exchange sections. This advantage is increasingly
25 critical for wire sections having small diameters, i.e. at or approaching 0.010 inch (0.025 cm).

As previously mentioned, the mechanical coupling of connectors 24 and 28 is releasable. More particularly, exchange section 20 is pulled proximally relative to the
30 guide section, whereby inclined surface 50 of the groove acts as a cam to deform the socket connector and thereby move the indentations radially outward and apart from one another. While the required axial force for disconnecting the extension section is greater than the
35 insertion force in joining the sections, disconnection nonetheless is conveniently accomplished manually, with one hand gripping each of the extension and guide

-12-

sections. Regardless of whether pin connector 28 is being inserted or removed, the requisite deformation of socket connector 24 is elastic, which allows for repeated connections and disconnections as required during the medical procedure, without reducing the efficacy of the mechanical coupling.

The use of guidewire 16 can be considered in connection with an angioplasty procedure to treat a blood vessel occlusion, formed for example due to an accumulation of plaque. This exemplary procedure involves two dilatation steps, followed by placement of a prosthesis.

The procedure is initiated by percutaneous and intravascular insertion of guide section 18, to a point where distal tip 22 is aligned with the occlusion site. At this stage, guide section 18 is free of exchange section 20. Nonetheless, guide section 18 is sufficiently long (e.g. 150 centimeters) such that with distal tip 22 so aligned, a proximal portion of the guide section including socket connector 24 remains outside of the patient.

Next, an initial dilatation catheter (not shown) is inserted, by placing its distal end over proximal end 52 of guide section 18. A lumen in the dilatation catheter accepts the guide section. The dilatation catheter is progressively advanced until a balloon at the distal end of a dilatation catheter is aligned with the occlusion. With guide section 18 in place, the dilatation catheter is positively directed toward the treatment site, and thus can be inserted relatively quickly without requiring undue attention. A proximal portion of the dilatation catheter remains outside of the patient, and the proximal portion of the guide section extends at least a slight distance proximally of the dilatation catheter. At this stage, the dilatation balloon is expanded to enlarge the vessel at the treatment site.

-13-

After the initial expansion of the vessel at the occlusion, the dilatation catheter is withdrawn. The conventional procedure involved removing a guidewire and inserting a much longer exchange wire. In accordance with the present invention, guide section 18 remains in place, while exchange section 20 is coupled to the guide section by inserting pin connector 28 into socket connector 24, while holding the socket connector in place to maintain the axial position of guide section 18. A simple and direct axial (distal) pushing of the pin connector is all that is required. The socket connector is elastically deformed temporarily, then rapidly returns to its normal configuration as groove 44 becomes aligned with indentations 58-64. This return of the socket connector brings the indentations against groove surface 46, providing a "snap fit" sensation that positively informs the physician with a tactile sensation of a successful coupling.

Several advantages arise from the fact that socket connector 24, when coupled, is in a relaxed state, rather than elastically deformed. First, there is no risk that gradually diminishing elastic restoring force might degrade the connection. Secondly, no torque is transferred through the interconnection. Accordingly, exchange section 20 can be rotated (whether intentionally or inadvertently) without rotating the proximal end of the guide section. Thus the exchange section can be manipulated as necessary, without the risk of twisting or kinking along the guide section.

Returning to the procedure, the coupling of guide section 18 and exchange section 20 substantially increases the length of wire outside of the patient (e.g. by another 150 centimeters). Exchange section 20 can be gripped by hand to maintain the axial position of guide section 18 while the initial dilatation catheter is proximally withdrawn.

-14-

After withdrawal, the guide and exchange sections remain coupled, as a second dilatation catheter (not shown) is inserted. More particularly, the second dilatation catheter has a lumen that accepts proximal end
5 26 of exchange section 20, enabling progressive advancement of the dilatation catheter along the guidewire until the second (perhaps larger) dilatation balloon is aligned at the treatment site. At this stage, connectors 24 and 28 are proximal of the second
10 dilatation catheter, and it is advantageous to disconnect and remove the exchange section. Disconnection is accomplished easily by hand, holding socket connector 24 in place while proximally pulling the exchange section near pin connector 28. Disconnection requires temporary
15 elastic deformation of socket connector 24. Disconnection is easily accomplished by hand. With the exchange section removed, there is no need for an attendant to handle an unwieldy length of exchange wire, and the physician can concentrate on the angioplasty
20 procedure at hand, without distraction due to the exchange wire, as the second dilatation balloon is expanded against the occlusion.

After the second dilatation step, exchange section 20 is again coupled to guide section 18 as described
25 above, and the second dilatation catheter is withdrawn over the guide and exchange sections. With the sections remaining coupled, a prosthesis delivery catheter is inserted over the proximal end of the exchange section, and advanced progressively until a prosthesis (e.g. a
30 radially self-expanding stent) at the distal end of the catheter is aligned at the treatment site. At this point the exchange section is disconnected and removed, leaving just the proximal portion of the guide section exposed beyond the prosthesis delivery catheter. The physician
35 can concentrate on prosthesis deployment and delivery, free of concern about exchange section 20.

-15-

Following prosthesis deployment, guide section 18 and the deployment catheter are withdrawn.

Alternatively, should any further catheters be required (e.g. an endoscopic catheter to view stent placement),

- 5 the guide and exchange sections are coupled once again to enable withdrawal of the delivery catheter while guide section 18 remains in place. In either event, repeated connections and disconnections of the guide and exchange sections do not structurally alter either connector, or
10 in any other manner degrade the quality of the mechanical coupling.

Figure 10 shows a socket connector 72 utilized in an alternative guidewire system, in which the exchange section is similar to exchange section 20. Three

- 15 indentations 74, 76 and 78 are formed in the annular wall of socket 72 at its medial region, with the indentations spaced apart from one another angularly by about 120°. Insertion of the exchange section into socket 72 forces indentations 74-78 radially outward away from one
20 another, much in the manner as described above in connection with socket connector 24. Again, mechanical coupling involves an axial alignment of the indentations with a groove in the tip connector, with the indentations captured within the groove.

- 25 Figures 11-15 illustrate another highly preferred embodiment guidewire 80, including a guide section 82 and an exchange section 84, coupled relative to one another by a socket connector 86. More particularly, a pin connector 88 at the proximal end of the guide section,
30 and a pin connector 90 at the distal end of the exchange section, are inserted into socket connector 86, to be retained within the socket connector as shown in broken lines.

Figure 12 shows pin connector 90 in greater detail.

- 35 A truncated conical region 92 converges distally from the nominal diameter of the exchange section to a shank 94 of the pin connector. An annular recess or groove 96 is

formed in the pin connector, near a cylindrical head 98 that forms the distal end of the pin connector. A steeply inclined groove surface 100 is disposed between the groove and the head. Between the groove and shank 94 is a more gradually inclined groove surface 102.

Pin connector 88 of the guide section is substantially identical to pin connector 90.

Socket connector 86 is shown in greater detail in Figures 13 and 14. The socket includes an annular wall 103 with opposite proximal and distal ends 104 and 106 for insertion of pin connectors 90 and 88, respectively. Connector wall 103 is selectively cut and crimped to form a proximal indentation 108 and a distal indentation 110, facing in opposite directions but otherwise substantially identical to one another. In each case, a transverse slit through connector wall 103 permits a controlled bending or crimping of a selected area of connector wall 103 on one side of the slit.

As seen in connection with proximal indentation 108 (Figure 14), the result of this selective reshaping is a gradually inclined wall portion 112 having an arcuate lateral profile terminating in a relatively steep distal edge 114. Wall portion 112 is visible in Figure 14 through an opening 115 between edge 114 and connector wall 103, which opening is formed as a result of the slit and selective reshaping.

Distal indentation 110 is substantially identical to indentation 108, having a gradually inclined wall portion 116 that terminates at a steeply inclined edge 118 (Figure 13).

Figure 15 schematically represents the insertion of pin connector 90 into socket connector 86. The diameter of head 98, indicated at "c", is less than the inside diameter "b" of the socket connector, but exceeds the distance "a" between proximal indentation 108 and the opposite side of wall 103. Thus, as pin connector 90 is moved rightward as viewed in the figure, head 98

-17-

eventually contacts wall portion 112 of indentation 108. Upon further rightward movement of the pin connector, head 90 elastically deforms socket connector 86, particularly in the region of indentation 108. As head 5 98 moves rightwardly along gradually inclined surface 112, the socket connector is deformed a sufficient amount to permit passage of the head rightwardly beyond indentation 108, to align the indentation with groove 96. The gradual incline of wall portion 112 facilitates 10 insertion of pin connector 90, much in the same manner that previously discussed cone surface 38 promotes insertion of pin connector 28.

Once head 98 is beyond indentation 108, socket connector 86 elastically recovers, i.e. returns to the 15 shape of its relaxed condition, wherein the indentation and opposite portion of connector wall 103 are once again separated by the distance "a". Elastic recovery is relatively rapid, due to the steep incline of groove surface 100 and the elastic restoring force in the socket 20 connector. Thus, as before, elastic recovery provides a tactile sensation that a mechanical coupling has been achieved. The relatively steep incline of groove surface 100, and the relatively steep incline of edge 114, insure that a proximal removal of pin connector 90 requires 25 substantially greater axial force than connector insertion.

Preferably, the distance "a" slightly exceeds the diameter "d" of groove 96, so that when mechanically coupled, pin connector 90 and socket connector 86 30 nonetheless remain free to rotate relative to one another, thus to allow exchange section 84 to rotate relative to guide section 82 while being maintained axially relative to the guide section. As previously noted, this feature prevents any substantial transfer of 35 torque from the exchange section to the guide section.

Pin connector 90 includes a gradually inclined groove surface 102 proximally of groove 96, as opposed to

-18-

the relatively steep surface 48 of pin connector 28. Surface 102 is not relied upon to limit the distal movement of pin connector 90 relative to socket connector 86. Rather, such distal movement is limited by conical region 92 of pin connector, as this surface encounters proximal end 104 of the socket connector.

Insertion of pin connector 88 into socket connector 86 is accomplished in much the same manner as insertion of pin connector 90, except that pin connector 88 is inserted into distal end 106 and moved in the proximal direction to the point of mechanical connection.

Thus, proximal indentation 108 and distal indentation 110 capture head 98 and a head 120 of pin connector 88, respectively, which maintains the mechanical coupling of the pin connectors within socket connector 86. Further, however, it is preferred to permanently bond the socket connector to pin connector 88 and guide section 82. This is accomplished by joining an inclined surface 122 of connector 88 to a similarly inclined surface at distal end 106 of the socket connector, after applying a suitable medical adhesive to one or both of these surfaces.

Socket connector 86 and pin connectors 88/90 afford several advantages over socket connector 24 and pin connector 28. Indentations 108/110, as compared to nodules 58-64, are easier to form, and can be formed with more consistency (tighter dimensional tolerances) over numerous repetitions. More importantly, however, is that indentations 108/110 can be formed asymmetrically, to provide the gradual wall portion in combination with the steep edge. The result, as noted above, is to facilitate insertion of the pin connectors while providing substantially increased resistance to their withdrawal, without the need for special shaping of the connector tip, e.g. as in providing conical head 32 of pin connector 28. The conical head is difficult to form, particularly for small diameter guidewires. Accordingly,

-19-

elimination of the need to fabricate the cone is a substantial advantage.

Typical guidewires in accordance with the present invention can have diameters ranging from about .014" to .018" (0.036 cm to 0.046 cm) for coronary applications, and from about .018" to .063" (0.046 cm to 0.16 cm) for peripheral applications. In one preferred version of guidewire 80, the wire, pin connector and socket connector dimensions in inches are as follows:

Pin Connectors:

Wire outside diameter: 0.014 (0.036 cm)
Shank outside diameter: 0.009 (0.023 cm)
Groove outside diameter: 0.007 (0.018 cm)
Head outside diameter: 0.009 (0.023 cm)

Socket Connector:

Length: 0.75 (1.91 cm)
Nominal inside diameter: 0.010 (0.025 cm)
Distance between indentations and opposite side of socket: 1.00 (2.54 cm)

Guidewire:

Outside diameter: 0.014 (0.036 cm)

Thus in accordance with the present invention, catheters can be exchanged repeatedly while a distal guide section remains in place for guiding each catheter to the treatment site. An exchange section is easily and quickly connected to the guide section to provide an extended proximal region of the guidewire when needed for catheter insertion or withdrawal. When no longer needed, the exchange section is easily disconnected. Because each connection and disconnection requires only a temporary elastic deformation of the connector structure, repeated connections and disconnections do not degrade the quality of the coupling. There is no substantial elastic load during coupling, further insuring against degradation and preventing the transfer of torque from the exchange section to the guide section. Finally, the

-20-

manner in which the nodules of one of the connectors are captured into a groove of the other connector, provides a tactile sensation to signal the physician of a successful coupling.

5 What is claimed is:

-21-

Claims

1. An interconnection apparatus for body insertable guidewires and exchange wires, including:
 - a first connector (28) at one end of a first
5 wire, said first connector (28) being substantially symmetrical about a first connector axis and having a first end region (32) and a recessed region (40) adjacent the first end region (32); and
 - a second connector (24) adapted for mounting at
10 one end of a second wire, said second connector (24) having a second connector axis and a projection means (58, 60, 62, 64);wherein the first and second connectors (24, 28), when positioned in confronting and at least
15 generally axially aligned relation, are movable axially toward one another into a mechanical coupling in which the projection means (58, 60, 62, 64) is aligned with and extends radially toward the recessed region (40); a selected one of the connectors (24, 28) elastically
20 deforming to allow the first end region (32) to travel axially inward past the projection means (58, 60, 62, 64) as the connectors (24, 28) are moved toward said mechanical coupling and further at least substantially elastically recovering upon movement of the connectors
25 (24, 28) into said mechanical coupling; the projection means (58, 60, 62, 64) and the first end region (32), with the connectors (24, 28) in said mechanical coupling, engaging one another to limit axial movement of the connectors (24, 28) away from one another to maintain the
30 mechanical coupling.
2. The apparatus of Claim 1 wherein:
 - the first and second connectors (24, 28) are rotatable relative to one another when in said mechanical coupling.
- 35 3. The apparatus of Claim 1 wherein:
 - said selected connector further is elastically deformable to allow axially outward passage of the

-22-

projection means (58, 60, 62, 64) past the first end region (32) to facilitate a release of said mechanical coupling.

4. The apparatus of Claim 3 further including:
5 a stop means (42) for preventing any substantial axially inward movement of the first end region (32) relative to the second connector (24), when the connectors (24, 28) are in said mechanical coupling.

5. The apparatus of Claim 4 wherein:
10 the recessed region (40) comprises a groove (44) between the first end region (32) and a second and opposite end region of the first connector (28), said projection means (58, 60, 62, 64) extending radially into the groove (44) when the connectors (24, 28) are in said
15 mechanical coupling.

6. The apparatus of Claim 5 wherein:
the stop means (42) comprises an inclined groove end surface between the groove (44) and the second end region.

7. The apparatus of Claim 4 wherein:
20 the stop means (42) comprises a truncated conical surface between the first connector (28) of the first wire and an end of the second connector (24), positioned to engage one another and thereby prevent
25 further axially inward movement of the first connector (24) relative to the second connector (28).

8. The apparatus of Claim 1 wherein:
said first end region (32) of the first connector (24) is a truncated cone diverging in the axial
30 direction toward the groove (44).

9. The apparatus of Claim 8 wherein:
said second end region (40) is a shank on the opposite side of the groove (44) from the truncated cone (32), with an outside diameter of the shank (40) and a
35 maximum outside diameter of the truncated cone (32) being greater than an outside diameter of the groove (44).

-23-

10. The apparatus of Claim 9 wherein:
the outside diameter of the shank (40) and the maximum outside diameter of the truncated cone (32) are substantially equal.
- 5 11. The apparatus of Claim 9 wherein:
said first connector (28), including the truncated cone (32), the groove (44) and the shank (40), is formed by selective removal of material from said one end of the first wire.
- 10 12. The apparatus of Claim 9 wherein:
said truncated cone (32) diverges at an angle of about 20° with respect to first connector axis.
13. The apparatus of Claim 12 further including:
two opposed groove end surfaces (48, 50)
- 15 proximate the cone and the shank, respectively, said end surfaces being inclined at an angle of at least 45° relative to the first connector axis.
14. The apparatus of Claim 1 wherein:
the second connector (24) comprises a socket
- 20 having an annular wall, and the first connector (28) is inserted into the socket and surrounded by the socket when in said mechanical coupling.
15. The apparatus of Claim 14 wherein:
the projection means (58, 60, 62, 64) comprises
- 25 at least one indentation formed in the annular wall along a medial region of the socket.
16. The apparatus of Claim 15 wherein:
the projection means (58, 60, 62, 64) comprises a plurality of indentations formed along the medial
- 30 region and equally angularly spaced apart from one another.
17. The apparatus of Claim 16 wherein:
the projection means (58, 60, 62, 64) comprises
- 35 four of the indentations angularly spaced apart from one another 90° to provide two pairs of opposed indentations at the medial region of the socket, wherein a distance

-24-

between each pair of opposed indentations is less than a nominal interior diameter of the socket.

18. The apparatus of Claim 17 wherein:

an outer diameter of the first end region (32)
5 of the first connector (28) is less than the nominal interior diameter of the socket and greater than the distance between each pair of opposed indentations (58, 60, 62, 64), and wherein the socket is elastically deformable to permit insertion of the first connector
10 (28) into the socket to carry the first end region (32) past the indentations (58, 60, 62, 64), to axially align the indentations (58, 60, 62, 64) and the groove (44).

19. The apparatus of Claim 15 wherein:

an outer diameter of the second end region of
15 the first connector (28) is less than the nominal interior diameter of the socket and exceeds the distance between each pair of opposed indentations (58, 60, 62, 64).

20. The apparatus of Claim 19 wherein:

20 the distance between each pair of opposed indentations (58, 60, 62, 64) is at least equal to an outer diameter of the groove (44), whereby the first connector (28), when in the mechanical coupling, is free to rotate relative to the socket about the first
25 connector axis.

21. The apparatus of Claim 5 wherein:

the first end region (32) comprises a head, the second end region comprises a shank (40), and said groove (44) has a diameter less than an outer diameter of the
30 shank (40) and less than an outer diameter of the head (32).

22. The apparatus of Claim 1 wherein:

the second connector (24) comprises a socket having an annular wall, the first connector (28) is
35 inserted into the socket and surrounded by the socket when in said mechanical coupling, and the projection

-25-

means (58, 60, 62, 64) comprises an indentation formed in the annular wall.

23. The apparatus of Claim 22 wherein:

5 said indentation (58, 60, 62, 64) includes a gradually inclined wall portion that terminates in a steeply inclined edge, and wherein said first end region, when traveling axially inward toward the indentation (58, 60, 62, 64), encounters the wall portion before encountering the edge.

10 24. A device for guiding and exchanging body insertable catheters, including:

a body insertable guide section formed of a flexible wire;

15 an exchange section formed of a flexible wire; a first connector (28) at an end of one of the flexible wire sections, said first connector (28) being substantially symmetrical about a first connector axis and having a first end region (32) and a recessed region (40) adjacent the first end region (32); and

20 a second connector (24) at an end of the other of said flexible wire sections, said second connector (24) having a second connector axis and a projection means (58, 60, 62, 64);

25 wherein the first and second connectors (24, 28), when positioned in confronting and at least generally axially aligned relation, are movable axially toward one another into a mechanical coupling in which the projection means (58, 60, 62, 64) is aligned with and extends radially toward the recessed region (40); a
30 selected one of the connectors (24, 28) elastically deforming to allow the first end region (32) to travel axially inward past the projection means (58, 60, 62, 64) as the connectors (24, 28) are moved toward said mechanical coupling and further at least substantially
35 elastically recovering upon movement of the connectors (24, 28) into said mechanical coupling; the projection means (58, 60, 62, 64) and the first end region (32),

-26-

with the connectors (24, 28) in said mechanical coupling, engaging one another to limit axial movement of the connectors (24, 28) away from one another to maintain the mechanical coupling.

5 25. The device of Claim 24 wherein:

 said at least one connector further is elastically deformable to allow axially outward passage of the projection means (58, 60, 62, 64) past the first end region (32) to release the mechanical coupling.

10 26. The device of Claim 25 wherein:

 the first end region (32) of the first connector (28) is a truncated cone converging in the axial direction toward the groove (44), and the first connector (28) further includes a second end region
15 comprising a shank (40) on the opposite side of the recessed region from the truncated cone (32).

 27. The device of Claim 26 wherein:

 an outside diameter of the shank (40) and a maximum outside diameter of a truncated cone (32) are
20 approximately equal to one another and are greater than an outside diameter of the recessed region (44).

 28. The apparatus of Claim 25 wherein:

 the first end region (32) of the first connector (28) comprises a cylindrical head.

25 29. The apparatus of Claim 26 wherein:

 the second connector (24) comprises a socket having an annular wall, and the first connector (28) is inserted into the socket and surrounded by the socket when in the mechanical coupling.

30 30. The device of Claim 29 wherein:

 the socket has a nominal inside diameter, and the projection means (58, 60, 62, 64) comprises at least one indentation formed in the annular wall.

 31. The device of Claim 30 wherein:

35 said at least one indentation includes a gradually inclined wall portion having an axially inward and steeply inclined edge.

-27-

32. The device of Claim 29 wherein:

the projection means (58, 60, 62, 64) comprises four indentations formed in the annular wall along the medial region and spaced apart angularly 90° from one another to provide two pairs of opposed indentations at the medial region, wherein a distance between each pair of opposed indentations is less than the nominal inside diameter.

33. The device of Claim 32 wherein:

respective outside diameters of the first end region (32) and the second end region of the first connector (28), are less than the nominal inside diameter of the socket and greater than the distance between each pair of indentations (58, 60, 62, 64).

34. The device of Claim 33 wherein:

the distance between each pair of opposed indentations (58, 60, 62, 64) is at least equal to an outside diameter of the groove (44).

35. The device of Claim 32 wherein:

the first end region (32) of the first connector (28) comprises a truncated cone diverging in the direction toward the groove (44), and the second end region of the connector comprises a shank (40) on the opposite side of the groove (44) from the cone (32) and having an outside diameter substantially equal to a maximum outside diameter of the truncated cone (32).

36. The device of Claim 27 wherein:

the guide section (18) includes a proximal extension (68), and a distal end portion of the socket surrounds the proximal extension (68).

37. The device of Claim 36 wherein:

the guide section (18) further includes an annular beveled transition surface (70) between the proximal extension (68) and the remainder of the guide section, and the socket has an annular beveled distal surface (66) parallel to the transition surface (70).

-28-

38. An interconnection apparatus for body insertable guidewires and exchange wires, including:

a first connector (90) at one end of a first wire and having a first end region (98) and a first

5 recessed region (96) adjacent the first end region (98);

a second connector (90) at one end of a second wire and having a second end region (98) and a second recessed region (96) adjacent the second end region (98);

an elongate third connector (86) having first
10 and second opposite ends for receiving the first and second connectors (90), respectively, and further having a first projection means (112) between the first and second ends;

wherein the first and second connectors (90),
15 when positioned in confronting relation to the third connector (86) at the first and second ends, respectively, are movable axially toward one another and relative to the third connector (86) into a mechanical coupling in which the first projection means (112) is
20 aligned with and projects radially toward the first recessed region (96); a selected one of the first and third connectors (86, 90) elastically deforming to allow the first end region (98) to travel axially inward past the projection means (112) as the connectors (86, 90) are
25 moved toward said mechanical coupling and further at least substantially elastically recovering upon achievement of said mechanical coupling, whereupon the first end region (98) and the first projection means (112) are positioned to engage one another to limit axial
30 movement of the first connector (90) and third connector (86) away from one another to maintain the mechanical coupling; and

a means for joining the second and third connectors (86, 90) to one another.

35 39. The apparatus of Claim 38 wherein:

said means for joining the second and third connectors (86, 90) to each other comprise an adhesive

-29-

for bonding said second end of the third connector (86) to the second connector (90).

40. The apparatus of Claim 38 wherein:

said means for joining the second and third
5 connectors (86, 90) comprises a second projection (116) means in the third connector (86) and axially spaced apart from the first projection means (112) and, upon
insertion of the second connector (90) a sufficient
distance to move the second end region (98) beyond the
10 second projection means (116), positioned to engage the second end region (98) to limit axial movement of the second connector (90) and third connector (86) axially
away from one another.

41. The apparatus of Claim 40 wherein:

15 the first and second projection means (112, 116) respectively comprise first and second indentations, each indentation including a gradually inclined wall portion terminating in a steeply inclined edge, and
wherein each of the first and second connectors (90),
20 when being inserted into the third connector (86) toward its associated indentations, encounters the gradually inclined wall portion before encountering the steeply inclined edge.

1/3

FIG. 1

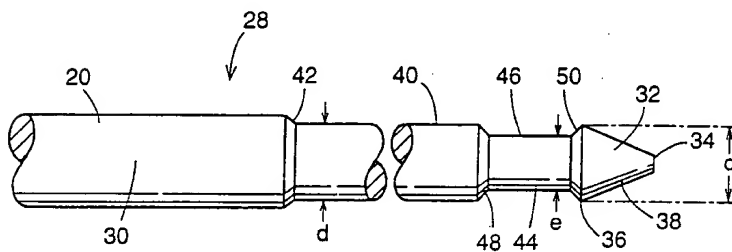
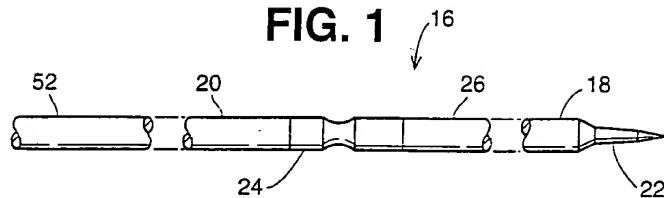


FIG. 2

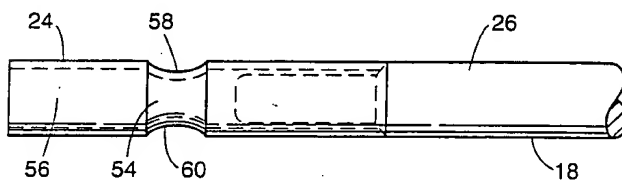


FIG. 3

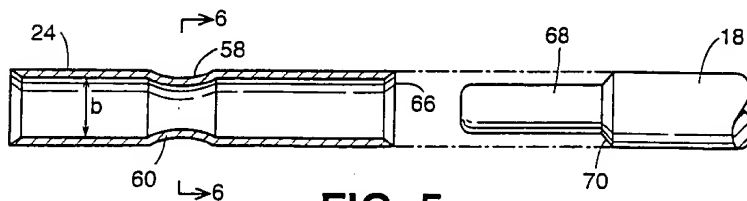


FIG. 5

FIG. 4

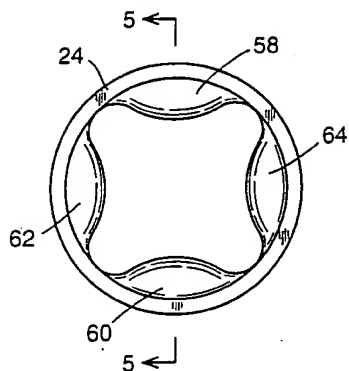


FIG. 6

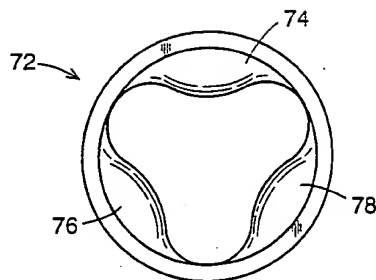
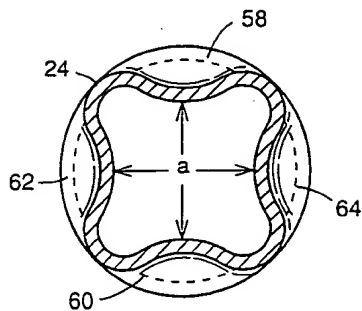


FIG. 10

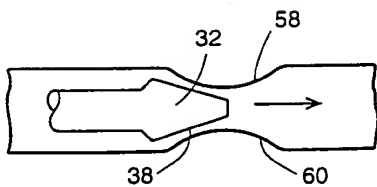


FIG. 7




FIG. 8

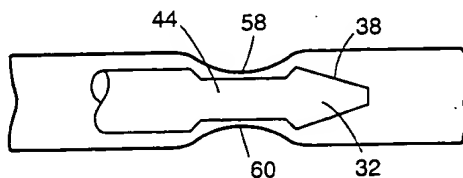


FIG. 9

FIG. 11

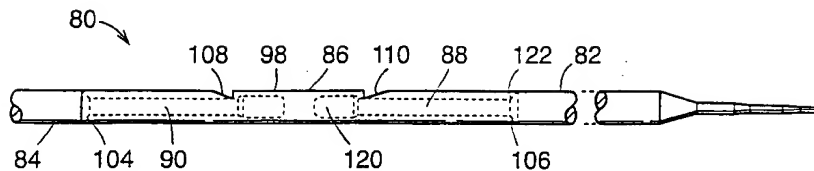


FIG. 12

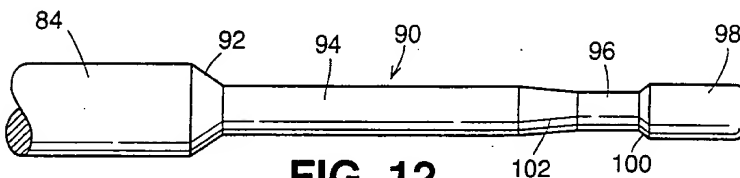


FIG. 13

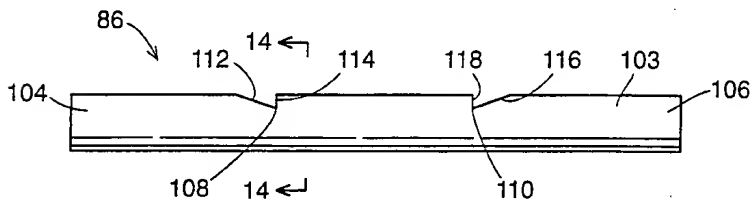


FIG. 14





FIG. 15

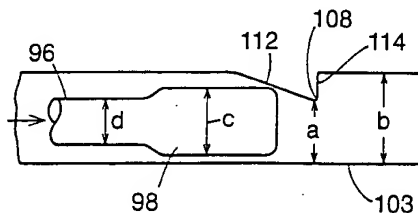

INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/IB 94/00058

A. CLASSIFICATION OF SUBJECT MATTER

A 61 M 25/01

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

A 61 M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A, 5 117 838 (M. PALMER et al.) 02 June 1992 (02.06.92), the whole document, especial- ly fig. 9; column 6, line 40 - column 7, line 19. --	1, 24, 38
A	US, A, 4 966 163 (J.L. KRAUS et al.) 30 October 1990 (30.10.90), the whole document (cited in the application). --	1, 24, 38
A	US, A, 4 846 193 (W.S. TREMULIS et al.) 11 July 1989 (11.07.89), the whole document, especially column 3, lines 34-68; column 4, lines	1, 24

☐ Further documents are listed in the continuation of box C.☐ Patent family members are listed in annex.

* Special categories of cited documents:

- 'A' document defining the general state of the art which is not considered to be of particular relevance
- 'E' earlier document but published on or after the international filing date
- 'L' document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- 'O' document referring to an oral disclosure, use, exhibition or other means
- 'P' document published prior to the international filing date but later than the priority date claimed

- 'T' later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- 'X' document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- 'Y' document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- 'Z' document member of the same patent family

Date of the actual completion of the international search

30 June 1994

Date of mailing of the international search report

28.07.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patenlaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+ 31-70) 340-3016

Authorized officer

LUDWIG e.h.

INTERNATIONAL SEARCH REPORT

-2-

Internat

Application No

PCT/IB 94/00058

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>29-43.</p> <p>--</p> <p>WO, A1, 92/18 051 (TARGET THERAP.) 29 October 1992 (29.10.92), fig. 7,8; page 7, line 30 - page 8, line 25.</p> <p>----</p>	1,24

ANHANG

zum internationalen Recherchen-
bericht über die internationale
Patentanmeldung Nr.

ANNEX

to the International Search
Report to the International Patent
Application No.

ANNEXE

au rapport de recherche inter-
national relatif à la demande de brevet
international n°

PCT/IB 94/00058 SAE 87433

In diesem Anhang sind die Mitglieder
der Patentfamilien der in obenge-
nannten internationalen Recherchenbericht
angeführten Patentdokumente angegeben.
Diese Angaben dienen nur zur Unter-
richtung und erfolgen ohne Gewähr.

This Annex lists the patent family
members relating to the patent documents
cited in the above-mentioned inter-
national search report. The Office is
in no way liable for these particulars
which are given merely for the purpose
of information.

La présente annexe indique les
membres de la famille de brevets
relatifs aux documents de brevets cités
dans le rapport de recherche inter-
national visé ci-dessus. Les renseigne-
ments fournis sont donnés à titre indica-
tif et n'engagent pas la responsabilité
de l'Office.

In Recherchenbericht angeführtes Patentdokument Patent document cited in search report Document de brevet cité dans le rapport de recherche		Datum der Veröffentlichung Publication date Date de publication	Mitglied(er) der Patentfamilie Patent family member(s) Membre(s) de la famille de brevets		Datum der Veröffentlichung Publication date Date de publication
US A	5117838	02-06-92	US A	5113872	19-05-92
			US A	5171888	09-03-93
			US A	5139032	18-08-92
US A	4966163	30-10-90	CA A	2009839	14-08-90
			EP A1	383159	22-08-90
			JP A2	3198870	30-08-91
US A	4846193	11-07-89	AU A1	22209788	23-03-89
			EP A1	313807	03-05-89
			JP A2	2001294	05-01-90
WG A1	9218051	29-10-92	AU A1	17957/92	17-11-92
			US A	5109867	05-05-92

This Page Blank (uspto)